



FASCIA WALL COLLECTION

DESCRIPTION: Base and Structural block single-sided & double-sided **TEXTURE:** Smooth


PALLET OVERVIEW - SINGLE-SIDED



OVERVIEW - DOUBLE-SIDED



PALLET OVERVIEW - BASE






COMPATIBLE CAPS

See page 109 for product compatibility.

See page 105 to 125 for more technical information.


Spe	cifications per pallet	Imperial	Metric	
SINGLE-SIDED		96 units	96 units	
	Cubing	31.00 ft ²	2.88 m ²	
		62.99 lin. ft	19.20 lin. m	
	Approx. Weight	2 612 lbs	1 185 kg	
	Number of rows	4		
	Coverage per row	7.75 ft ²	0.72 m ²	
	Linear coverage per row	15.75 lin. ft	4.80 lin. m	



Spe	ecifications per pallet	Imperial	Metric	
DOUBLE-SIDED		72 units	72 units	
	Cubing	23.25 ft ²	2.16 m ²	
		47.24 lin. ft	14.40 lin. m	
	Approx. Weight	2 138 lbs	970 kg	
	Number of rows	4		
	Coverage per row	5.81 ft ²	0.54 m ²	
	Linear coverage per row	11.81 lin. ft	3.60 lin. m	



Specifications per pallet		Imperial	Metric	
BASE		66 units	66 units	
	Cubing	25.58 ft ²	2.38 m ²	
		129.92 lin. ft	39.60 lin. m	
	Approx. Weight	3 701 lbs	1 679 kg	
	Number of rows	11		
	Coverage per row	2.33 ft ²	0.22 m ²	
	Linear coverage per row	11.81 lin. ft	3.60 lin. m	







ICONIC FASCIA WALL COLLECTION

DESCRIPTION: Fascia Panel & Corner **TEXTURE:** Natural Stone

PALLET OVERVIEW - PANELS



PALLET OVERVIEW - CORNERS





COMPATIBLE CAPS

See page 109 for product compatibility.

NOTES

See page 105 to 125 for more technical information.

Spe	cifications per pallet	Imperial	Metric	
		45 units	45 units	
	Cubing	47.95 ft ²	4.46 m ²	
⋖		97.44 lin. ft	29.70 lin. m	
FASCIA	Approx. Weight	1 390 lbs	630 kg	
7	Number of rows	3		
	Coverage per row	15.98 ft ²	1.49 m ²	
	Linear coverage per row	32.48 lin. ft	9.90 lin. m	




Specifications per pallet			Imperial		Metric			
		Cubing		24	24 units		24 units	
NER	Appro	Approx. Weight		700	700 lbs		318 kg	
CORNER	Numb	Number of rows		1				
J		height			35 ½ in		900 mm	
	L2	L2	Unit dimensio	ns	in	mm		Units/pallet
	J H	A	Heig	ght	5 %	150		12 units
LI		LEFT UNIT	Dep	th	2 3/4	70		
			Leng	gth	23 1/4	590		
	L2		Unit dimensio	ns	in	mm		Units/pallet
11	J H	В	Heig	ht	5 %	150		12 units
		RIGHT UNIT	Dep	th	2 3/4	70		
		T	Leng	gth	23 1/4	590		




INSTALLATION GUIDE

FREESTANDING WALL

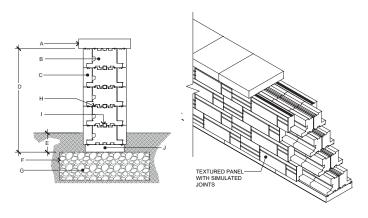


- A. TECHO-BLOC CAP UNIT SECURED TO CORE AND PANEL BELOW WITH CONCRETE ADHESIVE
- B. STRUCTURAL BLOCK DOUBLE-SIDED UNIT
- C. PANEL UNIT
- **D.** 29 1/2" (750 mm) MAX.
- E. EMBEDMENT DEPTH 6" (150 mm) MIN.
- F. GEOTEXTILE
- G. COMPACTED GRANULAR BASE 6" (150 mm) MIN. THICKNESS ACCORDING TO PROJECT SPECIFICATIONS
- H. CONCRETE ADHESIVE
- I. HDPE HORIZONTAL KEY
- J. BASE UNIT

FREESTANDING WALL - 90° CORNER

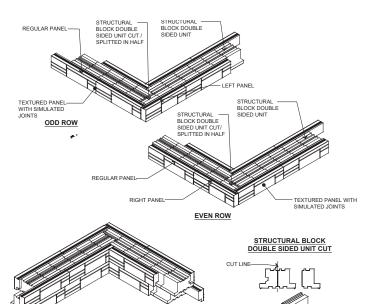

- 1. ALTERNATE ODD AND EVEN ROWS.
 - STAGGER STRUCTURAL BLOCKS JOINTS FROM ONE ROW TO THE NEXT.
- **3.** GLUE ALL STRUCTURAL BLOCKS AT EACH ROW WITH CONCRETE ADHESIVE.
- **4.** APPLY ADHESIVE ON TOP OF UPPERMOST PANEL UNITS TO FIX CAP UNITS.
- STRUCTURAL BLOCK DOUBLE SIDED UNIT CUT / SPLITTED IN HALF MUST ALWAYS BE PRESENT AT THE CORNER OF THE WALL.


GRAVITY RETAINING WALL

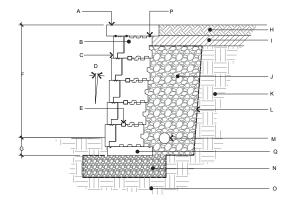


- **A.** TECHO-BLOC CAP UNIT SECURED TO UNIT BELOW WITH CONCRETE ADHESIVE
- B. STRUCTURAL BLOCK SINGLE SIDED UNIT
- C. PANEL UNIT
- **D.** WALL INCLINATION (5.3°)
- E. HDPE HORIZONTAL KEY
- F. EXPOSED HEIGHT
- G. EMBEDMENT DEPTH
- H. TOP SOIL
- I. LOW PERMEABILITY SOIL
- **J.** 3/4" (20 mm) CLEAN STONE 14" (350mm) THICK MIN.
- K. RETAINED SOIL
- L. GEOTEXTILE
- M. PERFORATED DRAIN
- N. LEVELING PAD
- **0.** FOUNDATION SOIL
- **P.** CONCRETE ADHESIVE
- Q. BASE UNIT

INSTALLATION GUIDE


FREESTANDING END OF A STRAIGHT WALL (OPTION 1)






NOTES:

- ALTERNATE ODD AND EVEN ROWS. STAGGER STRUCTURAL BLOCKS JOINTS
- FROM ONE ROW TO THE NEXT.
- GLUE ALL STRUCTURAL BLOCKS AT EACH ROW WITH CONCRETE ADHESIVE.
- APPLY ADHESIVE ON TOP OF UPPERMOST PANEL UNITS TO FIX CAP UNITS.




FREESTANDING END OF A STRAIGHT WALL (OPTION 2)

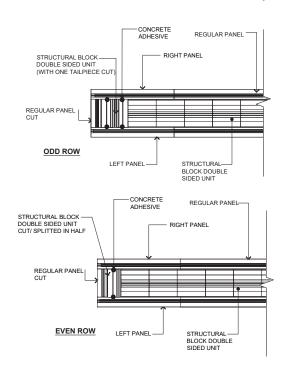

NOTES:


- ALTERNATE ODD AND EVEN ROWS.
 STAGGER STRUCTURAL BLOCKS JOINTS
 FROM ONE ROW TO THE NEXT.
- GLUE ALL STRUCTURAL BLOCKS AT EACH ROW WITH CONCRETE ADHESIVE
- APPLY ADHESIVE ON TOP OF UPPERMOST PANEL UNITS TO FIX CAP UNITS.




(660 mm)


INSTALLATION GUIDE

PILLARS - FASCIA WALL COLLECTION

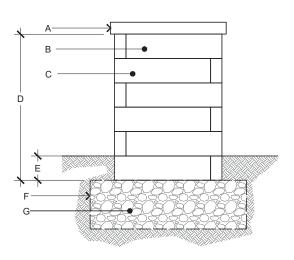


STRUCTURAL BLOCK SINGLE SIDED UNIT CUT / SPLITTED IN HALF





- PILLAR CAP UNIT SECURED TO CORE AND PANEL BELOW WITH CONCRETE ADHESIVE
- B. RIGHT PANEL
- C. LEFT PANEL
- **D.** 35 7/16" (900 mm) MAX HEIGHT
- E. EMBEDMENT DEPTH 6" (150 mm) MIN.
- F. GEOTEXTILE
- G. COMPACTED GRANULAR BASE 6" (150 mm) MIN. THICKNESS ACCORDING TO PROJECT SPECIFICATIONS.

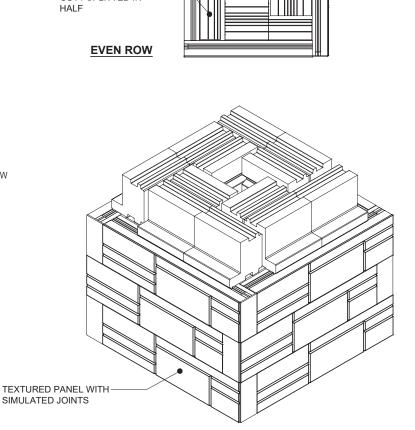

RIGHT PANEL -STRUCTURAL BLOCK SINGLE SIDED UNIT

STRUCTURAL BLOCK SINGLE SIDED UNIT CUT / SPLITTED IN

ODD ROW

STRUCTURAL BLOCK

SINGLE SIDED UNIT

CUT / SPLITTED IN

LEFT PANEL STRUCTURAL BLOCK
SINGLE SIDED UNIT

HALF

For all possible combinations of pillars and caps, please refer to the correspondence table on page 109