

TRAVERTINA RAW

DESCRIPTION: Double-sided wall **TEXTURE:** Brushed Travertine

PALLET OVERVIEW

300 300 300 300 300 300	53***50***50***50*	5-3405-344-34-34-34-34-3
Visite Control of the Control of		Section of the second section of the second section of the section of the second section of the s
	Commission (Commission)	
	The same of the sa	Y Too I Too I Too I Too I TO
Name of the second seco		brazarnazanazana





COMPATIBLE CAPS

See page 103 for product compatibility.

NOTES

The dimensional tolerance for Stonedge wet cast retaining wall units is: ± 3/16" (5 mm) for height and $\pm \frac{1}{2}$ " (13 mm) for length and width. During the installation, the level between adjacent wall units will vary (usually more than for a dry cast wall unit) in order to obtain a more realistic appearance of a natural stone wall.

See page 99 to 119 for more technical information.

Specifications per pallet	Imperial	Metric	
Cubing	31.75 ft ² /pal	2.95 m ² /pal	
	63.5 lin. ft /pal	19.36 lin. m /pal	
Approx. Weight	2 902 lbs	1 316 kg	
Number of rows	4		
Coverage per units	0.66 ft²/unit	0.06 m²/unit	
Coverage per row	7.94 ft ² /row	0.74 m ² /row	
Linear coverage per row	15.88 lin. ft/row	4.84 lin. m/row	



01 | Linear pattern



Patterns are for design inspiration only. The installer is responsible to calculate & purchase the correct amount of material.

Visit our werbsite for more patterns.





TRAVERTINA RAW

DESCRIPTION: Corners and pillars **TEXTURE:** Brushed Travertine

PALLET OVERVIEW

A	. A	A
۸	Λ	, A
A	, A	Α
۸	۸	^





COMPATIBLE CAPS

See page 103 for product compatibility.

NOTES

The dimensional tolerance for Stonedge wet cast retaining wall units is: $\pm\,^3/_{16}"$ (5 mm) for height and $\pm\,^1/_2"$ (13 mm) for length and width. During the installation, the level between adjacent wall units will vary (usually more than for a dry cast wall unit) in order to obtain a more realistic appearance of a natural stone wall.


See page 99 to 119 for more technical information.

Specifications per pallet		Imperial		Metric	
Cubing	24	24 units		24 units	
Approx. Weight	1 57	1 576 lbs		715 kg	
Number of rows	2				
Pillar height	36"	,	914 mm		
	Jnit dimensions	in	mm	Units/pallet	
DH A	Height Depth Length	6 7 ¹⁵ / ₁₆ 15 ⁷ / ₈	152 202 403	24 units	



INSTALLATION GUIDE


FREESTANDING WALLS - TRAVERTINA RAW

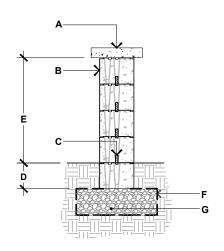


TRAVERTINA RAW


- A. TECHO-BLOC CAP UNIT, SECURED TO UNIT BELOW WITH CONCRETE ADHESIVE
- B. TRAVERTINA RAW DOUBLE-SIDED WALL UNIT SECURE EACH ROW WITH CONCRETE ADHESIVE
- **C.** CONNECTOR
- **D.** EMBEDMENT DEPTH, 6" (150 mm) MIN.
- **E.** 24" (612 mm) MAX.
- F. GEOTEXTILE
- **G.** COMPACTED GRANULAR LEVELING PAD, 6" (150 mm) THICK MIN. THICKNESS ACCORDING TO PROJECT SPECIFIC CONDITIONS

90° CORNER OF A DOUBLE-SIDED WALL

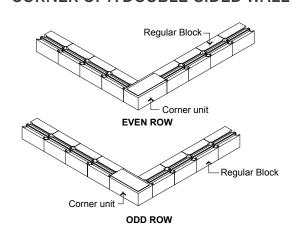

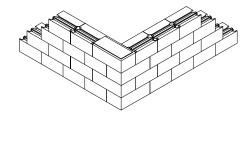

DOUBLE-SIDED WALL - END OF A STRAIGHT WALL

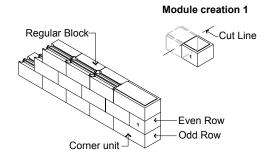


GENERAL NOTES

- 1. Alternate odd and even rows.
- 2. Stagger joints from one row to the next.
- Glue all modules at each row with a concrete adhesive.

INSTALLATION GUIDE

PILLARS - TRAVERTINA RAW

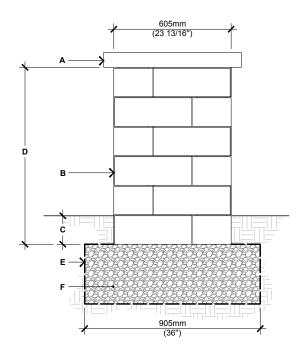

TRAVERTINA RAW

- **A.** PILLAR CAP UNIT (SECURE WITH CONCRETE ADHESIVE)
- **B.** TRAVERTINA RAW PILLAR UNIT SECURE EACH ROW WITH CONCRETE ADHESIVE
- C. EMBEDMENT 6" (150 mm) MIN.
- **D.** 36" (917 mm), HEIGHT PER PALLET 42" (1067 mm), MAXIMUM HEIGHT
- E. GEOTEXTILE
- F. COMPACTED GRANULAR BASE 6" (150mm) THICK MIN. THICKNESS ACCORDING TO PROJECT SPECIFIC CONDITIONS

For all possible combinations of pillars and caps, please refer to the correspondence table on page 103

Variable cap Travertina Raw wall unit

For all possible combinations of walls and caps, please refer to the correspondence table on page 103