


YORK 60"

DESCRIPTION: Step **TEXTURE:** Limestone surface with chiseled edges

PALLET OVERVIEW








NOTES


York is a single sided step chiseled on 3 sides.

* For an authentic look, each color option is composed of a variety of darker & lighter tones. Natural ingredients such as granite are present within the recipe to allow for a range in tones, veining and textures from one stone to another.

To achieve a natural appearance, product dimensions can vary ±3/16" (5 mm) for height and $\pm 1/2$ " (13 mm) for length and width.

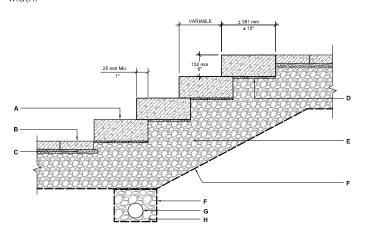

Imperial Specifications per pallet Metric Cubing 2 units 2 units Linear coverage per pallet 10 lin. ft/pal 3.05 lin. m/pal Approx. Weight 1029 lbs 467 kg Number of rows

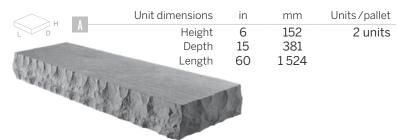

- YORK STEP UNIT A.
- B. TECHO-BLOC CONCRETE PAVER
- C. SETTING BED 1" (25 mm) THICK
- SETTING BED 1/2" (12 mm) MAX. TO COMPACT D. (AS REQUIRED FOR ALIGNMENT)
- COMPACTED GRANULAR BASE 0-3/4" (0-20 mm) THICKNESS ACCORDING TO PROJECT SPECIFIC CONDITIONS
- **GEOTEXTILE** F.
- G. PERFORATED DRAIN 4" (100 mm) DIA. CONNECTED TO SERVICES
- H. CLEAN STONE 3/4" (20 mm)

